

# Dome Camera

## High Resolution Dome Camera HS-CD3210/HS-CD3211/HS-CD3212



HS-CD3210




HS-CD3211



HS-CD3212

### Dimension Unit : mm

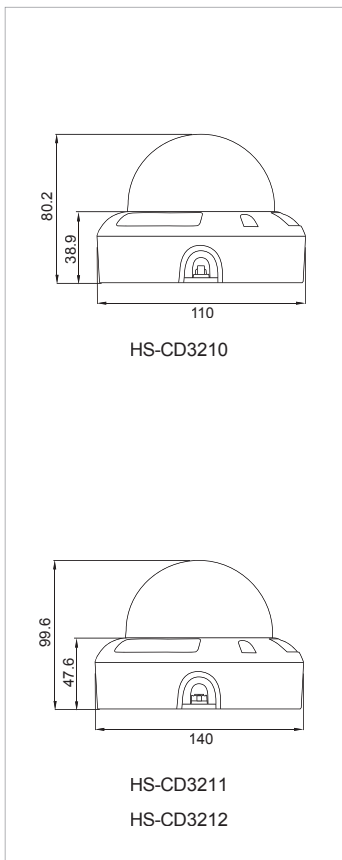

- 600/530 TVL High Resolution Camera.
- 3 Axis Camera Mechanism Adjustment Design.
- 21 IR LED for an Effective 15M Viewing Distance.(HS-CD3212)
- Electronic Day-and-Night Color/Mono Switching.
- Low Power Consumption Prolongs Product Liability.
- Solid and Compact Aluminum Die-Casting for Vandal Proof.
- Support both Side and Top Cable Wiring Method.
- Optional Wall Fixation Bracket and Cable Management.
- Class IP-65 Weatherproof Function.
- RoHS and WEEE Compliance.

### Specifications

Model	HS-CD3210	HS-CD3211	HS-CD3212
Pick up device	1/3" SONY Super HAD CCD II		
Total Pixels	NTSC:811(H)x508(V)/PAL:795(H)x596(V)		
Effective Pixels	NTSC:768(H)x494(V)/PAL:752(H)x582(V)		
Resolution	530TV lines		600TV lines
Lens mechanism	3 Axis		
Synchronization	Internal		
Scanning System	2:1 Interlace		
S/N Ratio	50dB		52dB
AGC	Auto		
AES	Auto		
AWB	Auto		
Electronic Shutter	Auto : 1/60 (1/50) ~ 1/100,000 sec		
Min. Illumination	0.2Lux / F2.0		0 Lux / F1.6 (IR ON)
Video Output	1.0Vp-p / 75 ohm composite		
Day & Night	Auto		
Lens Type	Board Lens : 4.3mm		Varifocal : 2.8~10mm
IR distance	N/A		15M (21pcs IR LED)
Power Source	DC12V±10% / 500mA		DC12V±10% / 1A
Power Consumption	1.2W (Max)	1.7W (Max)	3.7W (Max)
Current	100mA (Max)	140mA (Max)	310mA (Max)
Operating Temperature	-10°C ~ 50°C (14°F ~ 122°F)		
Storage Temperature	-20°C ~ 70°C (-4°F ~ 158°F)		
Dimension	80.2(H) x 110(Diameter)mm		99.6(H) x 140(Diameter)mm
Weight	N.W./G.W : 0.35kg / 0.405kg		N.W./G.W : 0.57kg / 0.67kg
Weatherproof	IP65		

